
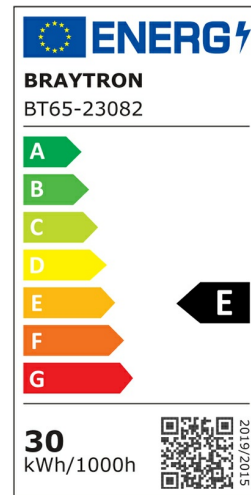


## PRODUCT DATASHEET

MODEL NO BT65-23082

DESCRIPTION BRY-FLOOD-PF-30W-GRY-3IN1-SNS-IP65-LED FLOODLIGHT

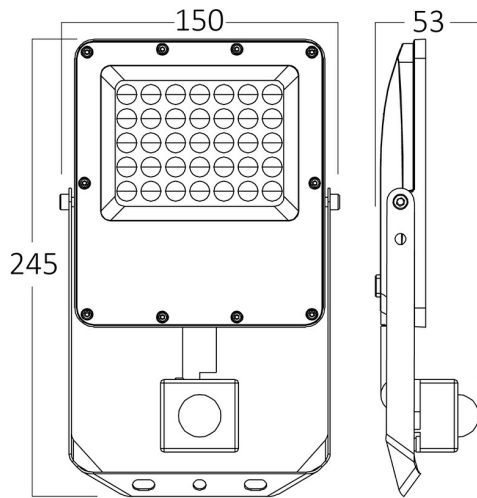

Luminare is intended to use in outdoor applications

### General Characteristics

|              |   |                  |
|--------------|---|------------------|
| Model No     | : | BT65-23082       |
| Main Family  | : | Outdoor Lighting |
| Sub Family   | : | LED Floodlight   |
| Type         | : | Floodlight       |
| Body Color   | : | Grey             |
| Lamp Shape   | : | Non-Directional  |
| Dimmable     | : | Not-Dimmable     |
| Light Source | : | LED              |
| Warranty     | : | 2 years          |
| Class        | : | Class I          |
| IP           | : | IP65             |
| IK           | : | IK06             |

### Electrical Characteristics

|                     |   |            |
|---------------------|---|------------|
| Lifetime            | : | 20000 h    |
| Voltage             | : | 220-240V   |
| Power Factor        | : | >0,9       |
| Material            | : | Aluminium  |
| Working Temperature | : | -20 C+40 C |
| Frequency           | : | 50-60 Hz   |

### Package Informations

|         |   |               |
|---------|---|---------------|
| N.W.    | : | 8,00 kgs      |
| G.W.    | : | 10,10 kgs     |
| PCS/CTN | : | 20 pcs        |
| Length  | : | 580 mm        |
| Width   | : | 310 mm        |
| Height  | : | 255 mm        |
| EAN     | : | 5949097743252 |

### Product Characteristics

|                             |   |             |
|-----------------------------|---|-------------|
| Wattage                     | : | 30 w        |
| Color Temperature           | : | 3IN1        |
| Quse Lumen                  | : | 3300 lm     |
| Color Rendering Index (CRI) | : | >80         |
| Energy Efficiency Level     | : | E           |
| Beam Angle                  | : | 90° Degrees |
| Color Category              | : | 3IN1        |

### Dimensions & Weight

|           |   |        |
|-----------|---|--------|
| P. Length | : | 245 mm |
| P. Width  | : | 53 mm  |
| P. Height | : | 150 mm |
| Weight    | : | 400 gr |

### Sensor Informations

|                     |   |                               |
|---------------------|---|-------------------------------|
| Sensor Type         | : | Motion                        |
| Detection Distance  | : | 4m-10m (adjustable)<br>(<24C) |
| Detection Speed     | : | 0,6-1,5m/s                    |
| Detection Angle     | : | 120° Degrees                  |
| Installation Height | : | 1,8m-2,5m                     |
| Time Delay          | : | 10sec-10min<br>(adjustable)   |
| Lux                 | : | 10-2000 lux                   |